


Direct Install (DI) - with Foil

The assembly is surrounded with a 125µm aluminium layer, bonded inside a sheath of flexible black PE for direct-in-duct installation. A rip cord is pre-installed along the entire length, under the sheath, to rip through the aluminium and sheath using correct procedure.

Also available in 8/6mm.



Product Code	Description	Microduct Size	Supply Length	Minimum Order Quantity	Drum Type	Product weight per metre gms	Total weight kg	Bundle OD mm	Min Bend rad mm	Max Pull N	Generic Specification
6285	1DI	5/3.5mm	4000m	4000m	G	49	288	8.4	120	400	MHT175
6286	2DI	5/3.5mm	4000m	4000m	MB5	77	406	8.4 x 13.4	120	600	MHT175
6287	4DI	5/3.5mm	4000m	4000m	1.4D	118	616	15.5	200	700	MHT175
6438	7DI	5/3.5mm	4000m	4000m	1.7D	162	885	18.4	240	1500	MHT175
6870	12DI	5/3.5mm	4000m	4000m	2.0D	240	1305	23.8	310	1600	MHT175
6289	19DI	5/3.5mm	3000m	3000m	2.2D	329	1557	27.8	360	2500	MHT175
6701	24DI	5/3.5mm	2000m	4000m	2.0D	437	1219	33.4	500	4000	MHT175
8357	1DI	10/8mm	2000m	4000m	G	98	288	13.4	180	700	MHT888
6797	2DI	10/8mm	2000m	4000m	MB5	162	422	13.4x23.4	180	1000	MHT888
6709L	4DI	10/8mm	2000m	4000m	1.7D	262	761	27.5	370	1700	MHT888
6886	7DI	10/8mm	2000m	4000m	2.0D	368	1081	33.4	500	2500	MHT888
60744	1DI	12/10mm	2000m	4000m	MB5	108	314	15.3	200	750	MHT888
60745	2DI	12/10mm	2000m	4000m	1.4D	178	500	15.3x27.3	200	1400	MHT888
60746	4DI	12/10mm	2000m	4000m	2.0D	302	949	32.4	500	2300	MHT888
60478	7DI	12/10mm	2000m	4000m	2.35D	413	1377	39.4	600	3200	MHT888

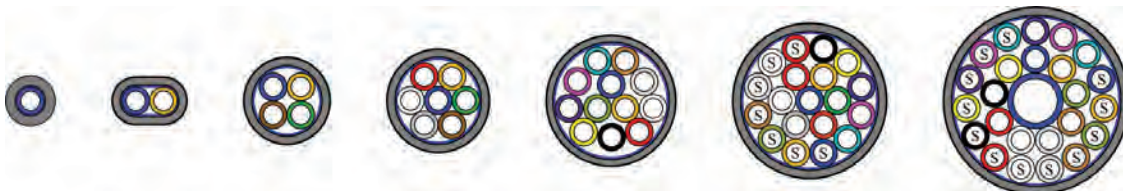

Direct Install metal free (DImf)

It is essential that users of this product securely anchor the sheath and contents of the tube bundle to a fixed point (eg manhole side or duct mouth) wherever the product emerges from a duct section. These duct sections should not be longer than 500m. Refer to specification MHT1772.

A simple sheathed bundle incorporating no metal, suitable for pulling into duct using moderate force.

When using Emtelle Direct Install Metal Free Products adequate provision must be made to take account of all strain which may be caused by installation forces, practices and procedures, thermal changes, heat reversion or any other reasonably foreseeable force applied to the product.



Description	Microduct Size	Supply Length	Minimum Order Quantity	Drum Type	Product weight per metre gms	Total weight kg	Generic Specification	Product Code
1DImf	5/3.5mm	4000m	4000m	G	47	280	MHT1772	8321T
2DImf	5/3.5mm	4000m	4000m	MB5	71	382	MHT1772	8374T
4DImf	5/3.5mm	4000m	4000m	1.4D	109	580	MHT1772	8353T
7DImf	5/3.5mm	4000m	4000m	1.7D	151	841	MHT1772	8008LT
12DImf	5/3.5mm	4000m	4000m	2.0D	224	1241	MHT1772	8375T
19DImf	5/3.5mm	4000m	4000m	2.35D	310	1791	MHT1772	8367T
24DImf	5/3.5mm	2000m	4000m	2.0D	410	1165	MHT1772	60782