


PVC CONTROL CABLE 0.6/1kV 2.5mm²

APPLICATION: 0.6/1KV PVC Sheathed multi-core control cables are mostly used for control circuits in buildings, industrial plants, gantry wiring and road transport depots where not subject to mechanical damage. The cables are suitable for installation indoor/outdoor, enclosed in conduit and in underground duct.

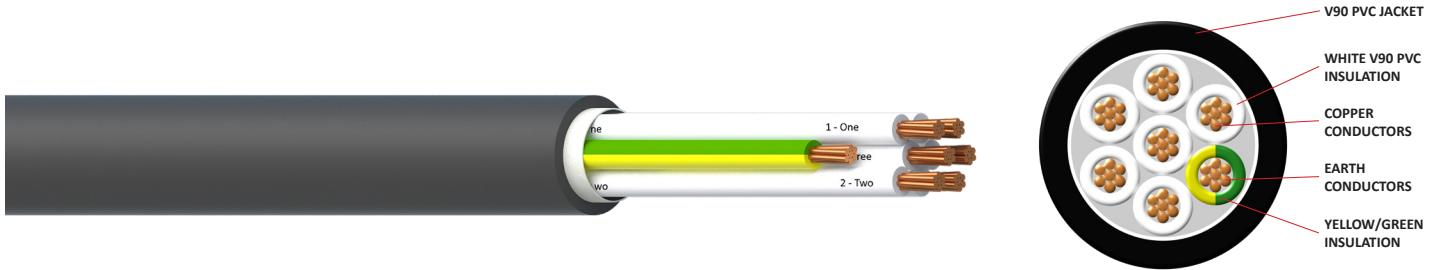

Conductor	Plain annealed copper (class 2 strands) of the type specified in AS/NZS 1125
Insulation	Active Core: PVC, V90, White with Black Numbering Earth Core: PVC, V90, Green/Yellow
Sheath	PVC, 5V-90, Flame Retardant Black (UV Stabilised) Optional: Orange Sheath
Voltage Rating	0.6/1kV
Operating Temp.	-25°C to +75°C, Max. 90°C, short circuit temperature 160°C for 5 sec
Temperature at Surface	In Operation, -25°C ~ 90°C
Minimum Ambient Temperature	0°C after installation and only when cable is in a fixed position
Minimum Bending Radius	6 x cable O.D. during installation 4 x cable O.D. after installation
Standards	International: IEC 60502, IEC 60228, IEC 60332 Australian/New Zealand: AS/NZS 5000.1, AS/NZS 3808, AS/NZS 1125, AS/NZS 1660

Product Code	No. of Cores	Conductor Area (mm ²)	Conductor Stranding (No./mm)	Insulation Thickness (mm)	Nominal O.D. (mm)	Approx. Weight (kg/km)
MAUCC 2C+E/2.5	2C+E	2.5	7/0.67	0.8	11.8	205
MAUCC 3C+E/2.5	3C+E	2.5	7/0.67	0.8	12.7	247
MAUCC 4C+E/2.5	4C+E	2.5	7/0.67	0.8	13.7	292
MAUCC 6C+E/2.5	6C+E	2.5	7/0.67	0.8	14.8	366
MAUCC 8C+E/2.5	8C+E	2.5	7/0.67	0.8	15.9	441
MAUCC 10C+E/2.5	10C+E	2.5	7/0.67	0.8	18.4	547
MAUCC 12C+E/2.5	12C+E	2.5	7/0.67	0.8	19.9	634
MAUCC 15C+E/2.5	15C+E	2.5	7/0.67	0.8	20.9	740
MAUCC 20C+E/2.5	20C+E	2.5	7/0.67	0.8	23.2	933
MAUCC 25C+E/2.5	25C+E	2.5	7/0.67	0.8	25.6	1133
MAUCC 30C+E/2.5	30C+E	2.5	7/0.67	0.8	28.1	1342
MAUCC 40C+E/2.5	40C+E	2.5	7/0.67	0.8	31.7	1739
MAUCC 50C+E/2.5	50C+E	2.5	7/0.67	0.8	34.6	2121

Disclaimer: Although Maser Australia makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein