


ControlNet

RG6 Quad Shield Cable LSZH FireFighter®

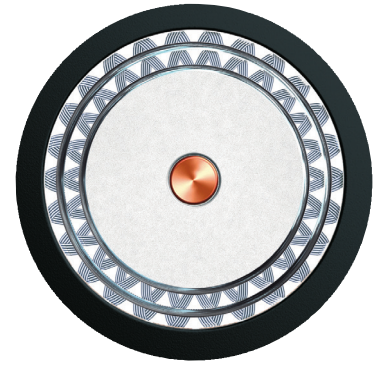

Cable Design

Conductor	Solid bare copper wire (18awg)	Ø 1,0 mm
Dielectric	Foam Polyethylene (PE)	Ø 4,60 mm
Quad Shield	1 - Aluminium/polyester/Aluminium tape	Ø 4,70 mm
	2 - Aluminium braid outer conductor 57% coverage	Ø 5,35 mm
	3 - Aluminium/polyester/Aluminium tape	Ø 5,45 mm
	4 - Aluminium braid outer conductor 40% coverage	Ø 6,10 mm
Outer Jacket	LSZH FireFighter®, Black	Ø 7,60 ± 0,20 mm

Electrical Data @ 20°C

Impedance	75 ± 3	Ohm
Capacitance	53	pF/m
Velocity ratio	84	%
Screening effectiveness	100-900 MHz >	95 dB
Inner conductor resistance	22,5	Ohm/km
Outer conductor resistance	10,5	Ohm/km

Specification

Part Number	Type
402186044	RG 6/U Type 18awg quad shield cable for ControlNet applications (LSZH FireFighter®)



ControlNet

RG6 Quad Shield Cable LSZH FireFighter®

Attenuation

Frequency (MHz)	dB/100m
50	4,4
230	9,6
470	13,9
860	19,5
1000	21,3
1350	25,0
1500	27,0
1750	29,1
2150	32,8
2400	35,2
3000	40,5

Structural Return Loss

Frequency (MHz)	dB
30 - 470	> 33
470 - 860	> 31
860 - 2150	> 25
2150 - 3000	> 22

Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.