
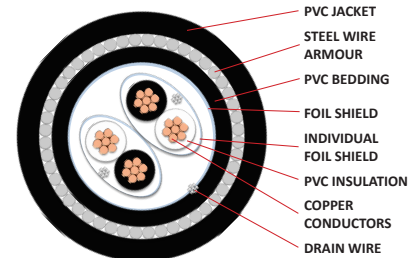


## INSTRUMENTATION CABLE

### 0.5mm<sup>2</sup> IS&OS SWA - BLACK

#### NOT FOR MAINS CONNECTION

**APPLICATION:** Used in process control applications for interconnecting measurement instruments, instrument panels, sensing devices and control systems. These cables are not to be regarded as power cables and should not be used for the direct connection of equipment to mains power supplies.



#### TECHNICAL DATA

Conductor	Stranded Plain Annealed Copper Conductor 0.5mm <sup>2</sup> (7/0.30)
Insulation	PVC, V-90, White & Black Numbered Twisted Pair
Screen	Individual & Overall Aluminium/Polyester Foil Shield with 7/0.20 Tinned Copper Drain Wire
Bedding	Black PVC, 5V-90, Flame Retardant
Armouring	Single layer galvanised (mild) steel wires helically applied over bedding
Sheath	Black PVC, 5V-90, Flame Retardant UV Resistant
Operating Voltage	110V AC/150V DC
Operating Temperature	-20°C to +90°C
Bending Radius	12D
Standards	International: IEC 60332-3-22, IEC 60079.14 Australia/NZ: AS/NZS 1125, AS/NZS 3808, AS/NZS 1660, AS/NZS 3863

Maximum Current Rating (Amps)	3.2
Conductor Resistance @ 20°C (Ω/km)	38.4
Capacitance Cond. to Cond. - Unscreened (pf/m)	85
Capacitance Cond. to Cond. - Screened (pf/m)	145
Capacitance Cond. to Scr. - Screened (pf/m)	240
Characteristic Impedance @ 1kHz Unscreened (Ohms)	380
Characteristic Impedance @ Screened 1kHz (Ohms)	300
Inductance @ 1kHz (mH/km)	1.0
LR Ratio (uH/Ω)	13.7

#### PHYSICAL CHARACTERISTICS

Product Code	No. of Pairs	Conductor Area (mm <sup>2</sup> )	Conductor Stranding (No./mm)	Insulation Thickness (mm)	Nominal O.D. Under Armour (mm)	Nominal O.D. (mm)	Approx. Weight (kg/km)
MAU5002ESCS SWA	2	0.5	7/0.30	0.4	9.0	13.4	321
MAU5004ESCS SWA	4	0.5	7/0.30	0.4	10.0	14.6	394
MAU5006ESCS SWA	6	0.5	7/0.30	0.4	11.8	17.3	620
MAU5008ESCS SWA	8	0.5	7/0.30	0.4	12.7	18.4	702
MAU5010ESCS SWA	10	0.5	7/0.30	0.4	14.8	20.7	835
MAU5012ESCS SWA	12	0.5	7/0.30	0.4	15.3	21.2	892
MAU5016ESCS SWA	16	0.5	7/0.30	0.4	17.0	23.6	1185
MAU5020ESCS SWA	20	0.5	7/0.30	0.4	18.4	25.2	1339
MAU5024ESCS SWA	24	0.5	7/0.30	0.4	21.0	28.2	1556
MAU5036ESCS SWA	36	0.5	7/0.30	0.4			
MAU5050ESCS SWA	50	0.5	7/0.30	0.4			

Disclaimer: Although Maser Australia makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein