


INSTRUMENTATION CABLE

1.5mm² OS SWA - BLUE

NOT FOR MAINS CONNECTION

APPLICATION: Used in process control applications for interconnecting measurement instruments, instrument panels, sensing devices and control systems. These cables are not to be regarded as power cables and should not be used for the direct connection of equipment to mains power supplies.

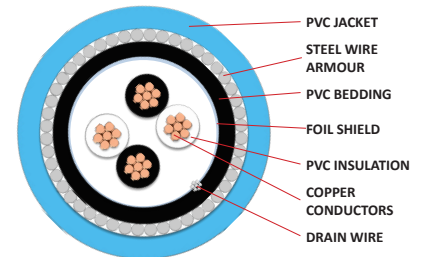

TECHNICAL DATA

Conductor	Stranded Plain Annealed Copper Conductor 1.5mm ² (7/0.50)
Insulation	PVC, V-90, White & Black Numbered Twisted Pair
Screen	Overall Aluminium/Polyester Foil Shield with 7/0.20 Tinned Copper Drain Wire
Bedding	Black PVC, 5V-90, Flame Retardant
Armouring	Single layer galvanised (mild) steel wires helically applied over bedding
Sheath	Blue PVC, 5V-90, Flame Retardant UV Resistant
Operating Voltage	110V AC/150V DC
Operating Temperature	-20°C to +90°C
Bending Radius	12D
Standards	International: IEC 60332-3-22, IEC 60079.14 Australia/NZ: AS/NZS 1125, AS/NZS 3808, AS/NZS 1660, AS/NZS 3863

Maximum Current Rating (Amps)	13
Conductor Resistance @ 20°C (Ω/km)	13.6
Capacitance Cond. to Cond. - Unscreened (pf/m)	110
Capacitance Cond. to Cond. - Screened (pf/m)	200
Capacitance Cond. to Scr. - Screened (pf/m)	300
Characteristic Impedance @ 1kHz Unscreened (Ohms)	200
Characteristic Impedance @ Screened 1kHz (Ohms)	150
Inductance @ 1kHz (mH/km)	0.95
LR Ratio (uH/Ω)	36.5

PHYSICAL CHARACTERISTICS

Product Code	No. of Pairs	Conductor Area (mm ²)	Conductor Stranding (No./mm)	Insulation Thickness (mm)	Nominal O.D. Under Armour (mm)	Nominal O.D. (mm)	Approx. Weight (kg/km)
MAU5102CS SWA BE	1	1.5	7/0.50	0.4	7.0	11.4	255
MAU5502CS SWA BE	2	1.5	7/0.50	0.4	10.2	14.8	388
MAU5504CS SWA BE	4	1.5	7/0.50	0.4	11.8	17.5	640
MAU5506CS SWA BE	6	1.5	7/0.50	0.4	13.7	19.4	780
MAU5508CS SWA BE	8	1.5	7/0.50	0.4	14.5	20.2	881
MAU5510CS SWA BE	10	1.5	7/0.50	0.4	17.1	23.9	1212
MAU5512CS SWA BE	12	1.5	7/0.50	0.4	17.7	24.5	1308
MAU5516CS SWA BE	16	1.5	7/0.50	0.4	19.7	26.7	1550
MAU5520CS SWA BE	20	1.5	7/0.50	0.4	21.4	28.6	1779
MAU5524CS SWA BE	24	1.5	7/0.50	0.4	24.2	31.4	2042
MAU5536CS SWA BE	36	1.5	7/0.50	0.4			
MAU5550CS SWA BE	50	1.5	7/0.50	0.4			

Disclaimer: Although Maser Australia makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein