


GARDEN LIGHTING CABLE 2 CORE PARALLEL WEBBED

EXTRA LOW VOLTAGE - NOT FOR MAINS CONNECTION

APPLICATION: Designed for the interconnection and supply of extra-low-voltage (ELV) lighting equipment in garden, landscape and other outdoor lighting applications.

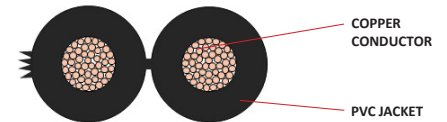

TECHNICAL DATA

Conductor	Stranded Bare Copper Conductor
Insulation	V-90 HT PVC
Insulation Thickness	MAUGL42020 - 0.9mm MAUGL80020 - 1.0mm MAUGL127020 - 1.0mm MAUGL192020 - 1.0mm
UV Resistant	Yes
Nominal Conductor DC Resistance (Ω/km) @ 20°C	MAUGL42020 - ≤ 14.0 MAUGL80020 - ≤ 7.5 MAUGL127020 - ≤ 4.65 MAUGL192020 - ≤ 3.08
Insulation Voltage Rating (V)	ELV
Temperature Rating	-20°C to +90°C
Standards	AS/NZS 1125 AS/NZS 3808 AS/NZS 1574 IEC 60332-1

PHYSICAL CHARACTERISTICS

Product Code	Conductor Area (mm ²)	Conductor Stranding (Strands/Diam)	Nominal O.D. (mm)	Reel Quantity (m)	Package Dimensions (LxWxH)	Package Weight (kg)
MAUGL42020/100m	1.3	42/0.20	7.2 x 3.4	100	20 x 20 x 18cm	5.8
MAUGL80020/100m	2.5	80/0.20	8.7 x 4.2	100	25 x 25 x 18cm	9.0
MAUGL127020/100m	4.0	127/0.20	9.6 x 4.7	100	25 x 25 x 21cm	12.5
MAUGL192020/100m	6.0	192/0.20	11.5 x 5.6	100	29 x 29 x 24cm	17.3

Disclaimer: Although Maser Australia makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein